

Denta Properties & Infrastructures Pvt Ltd

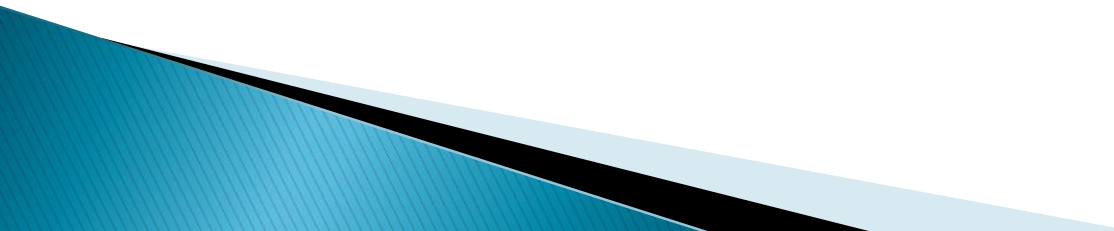
Name of the Project: "Multi Village Scheme for providing drinking water to Chikkabenaikal and other 61 habitations of Gangavathi taluk in Koppal district".

Awarded To: *Veerayya Hiremath, SPML JV by RWSSD Department, GOK.*

Execution By: *M/s. Denta Properties & Infrastructures Pvt Ltd.*

PROJECT DETAILS

- ▶ Date of Agreement : 27th Mar, 2023
 - ▶ Date of Commencement : 28th Mar, 2023
 - ▶ Project Completion Date : 26th June, 2024

 - ▶ Agreement Value :
- 

Scope of work

- ▶ Qty. of water to be Pumped : 8.5 MLD
- ▶ Sources Location : Thungabhadra River
- ▶ No of Habitations : 62nos.
- ▶ Water Treatment Plant : 1 no of proposed WTP of 8.5MLD.

- ▶ No. of Pumping Stations : 2nos.
- ▶ No. of Master & Zonal Balancing Tanks : 4no.
- ▶ No. of Intermediate Pumping Stations : 2nos.
- ▶ Total Length of Pipeline : 220.381Kms
 - HDPE - 181.672Kms
 - Ductile Iron - 38.709Kms

- ▶ Construction of 11KV Sub stations near by each pump house with Transmission line connecting by existing sub station to pump house substation.

Present Status of work

- Survey Status : Survey Work is in progress for Pipeline network & Gravity Network.
- Submission of Designs : Preparation of Raising Main, Gravity main, WTP, Structural designs are in progress.



Thank You